


CE

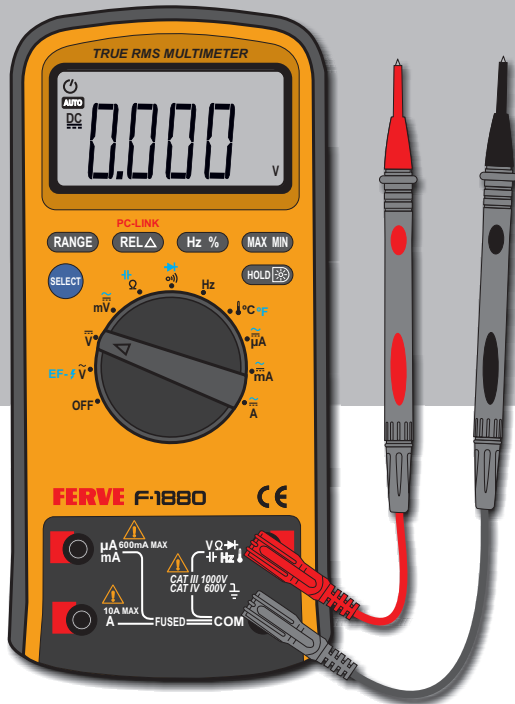

FERVE

F-1880

MULTIMETER



E PRECAUCIONES

GB PRECAUTIONS

F PRÉCAUTIONS

D VORSICHTSMASSNAHMEN

NL WAARSCHUWINGEN





E CONTENIDO

GB CONTENT


F CONTENU


D INHALT


NL INHOUD

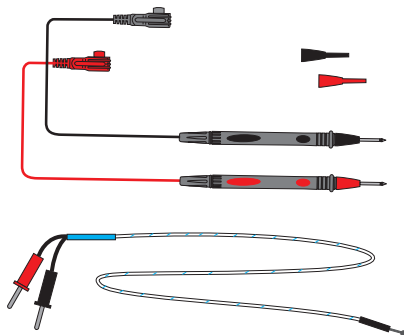



- Más información:
https://www.ferve.com/images/Instruccions/Instruccions_F-1880_2_web.pdf
- For more information go to:
https://www.ferve.com/images/Instruccions/Instruccions_F-1880_2_web.pdf
- Plus d'information sur :
https://www.ferve.com/images/Instruccions/Instruccions_F-1880_2_web.pdf
- Weitere Informationen finden Sie auf:
https://www.ferve.com/images/Instruccions/Instruccions_F-1880_2_web.pdf
- Meer informatie in:
https://www.ferve.com/images/Instruccions/Instruccions_F-1880_2_web.pdf

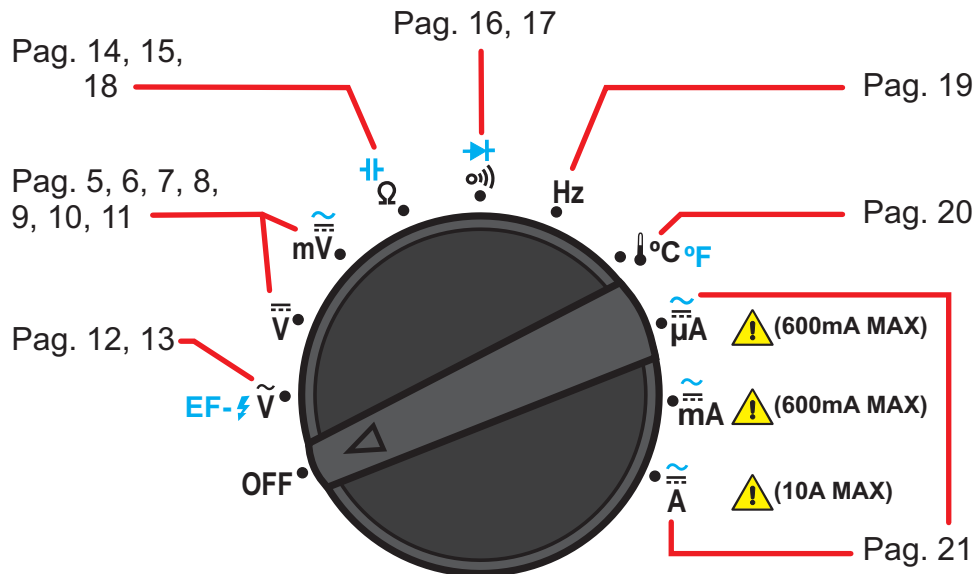


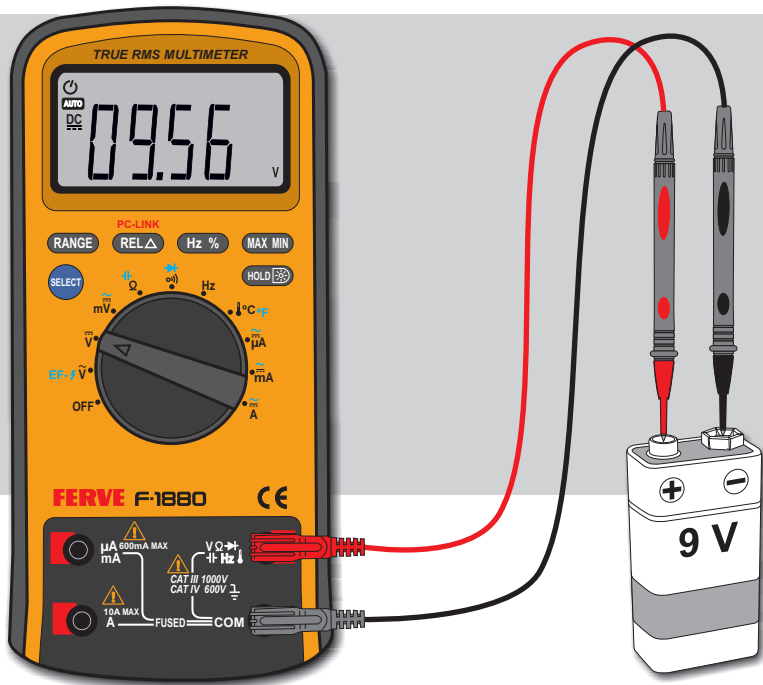


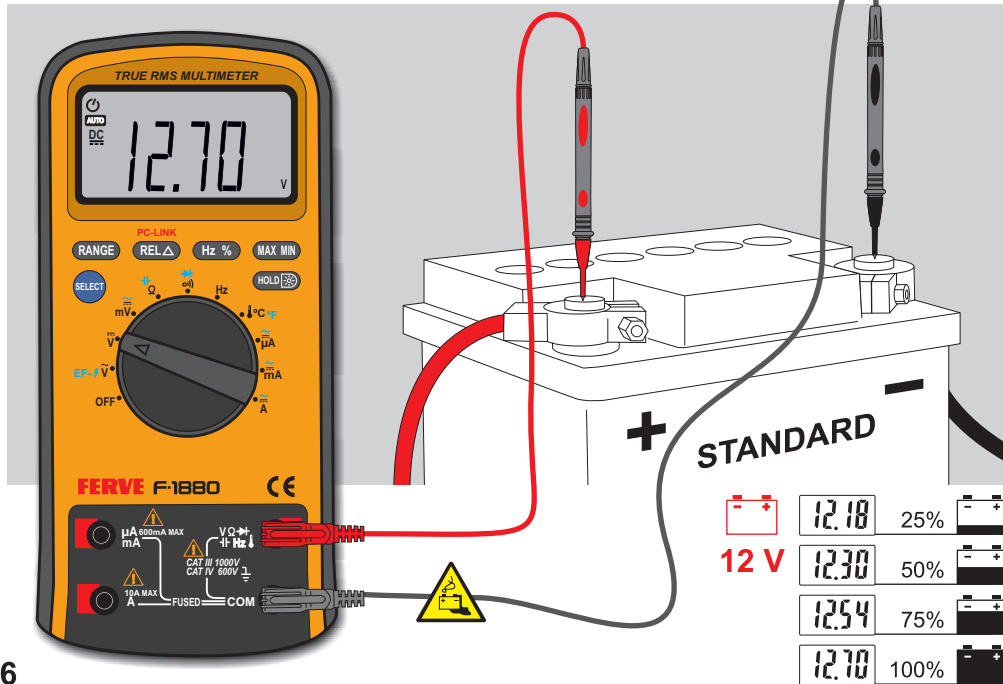

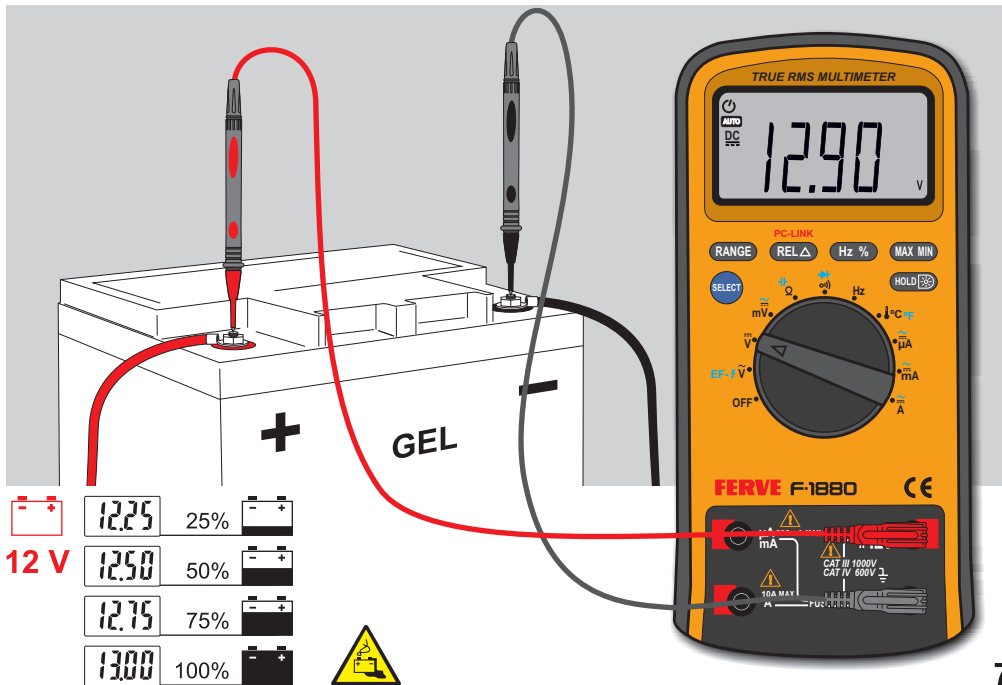

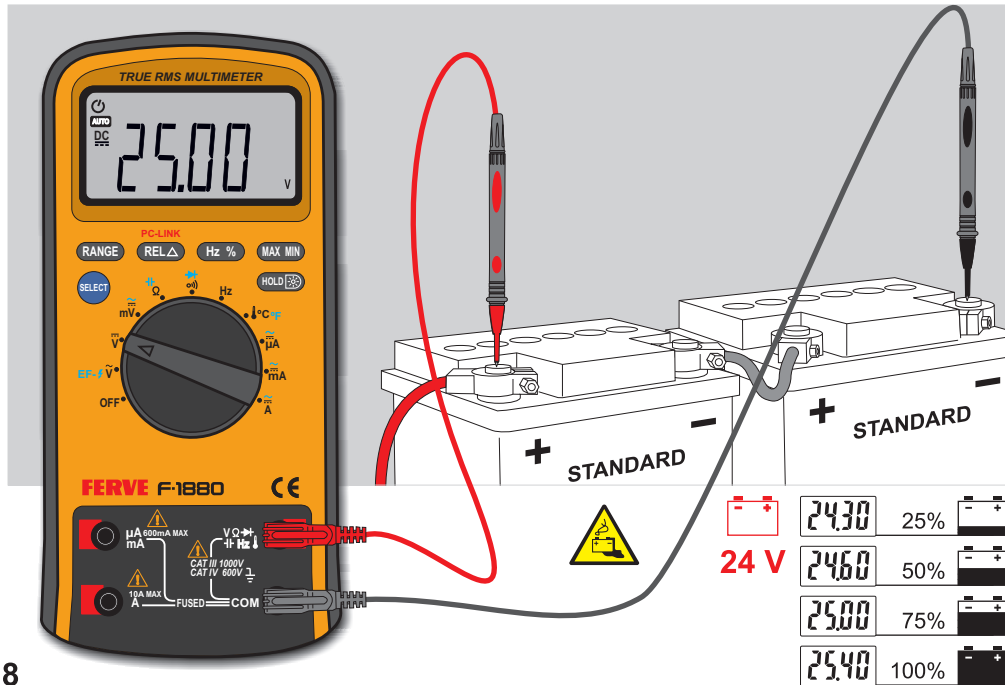

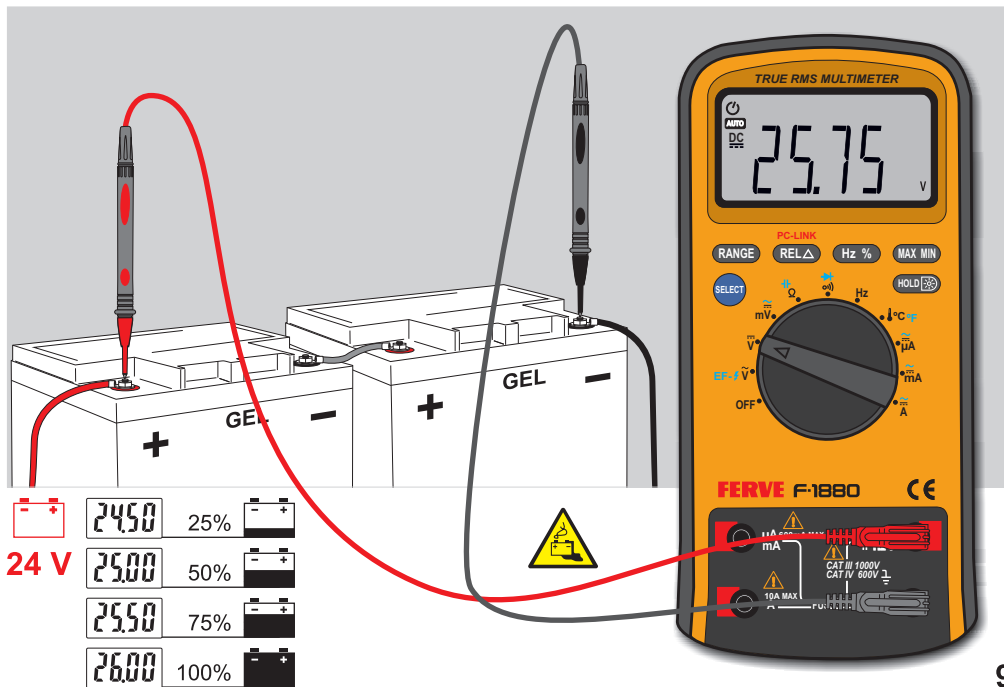

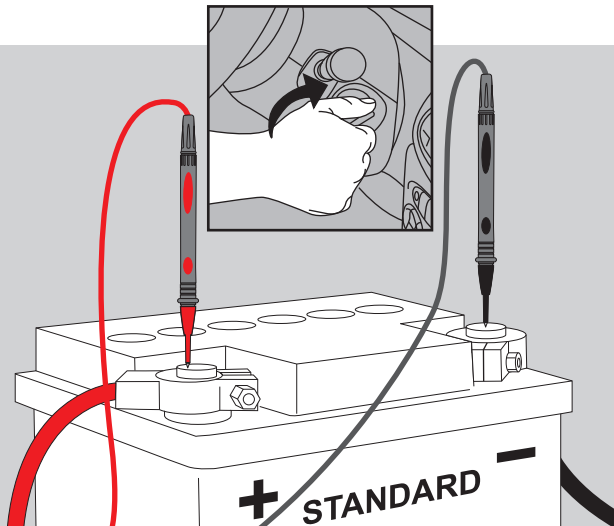

<13,30





13,30 / 14,80



>14,80




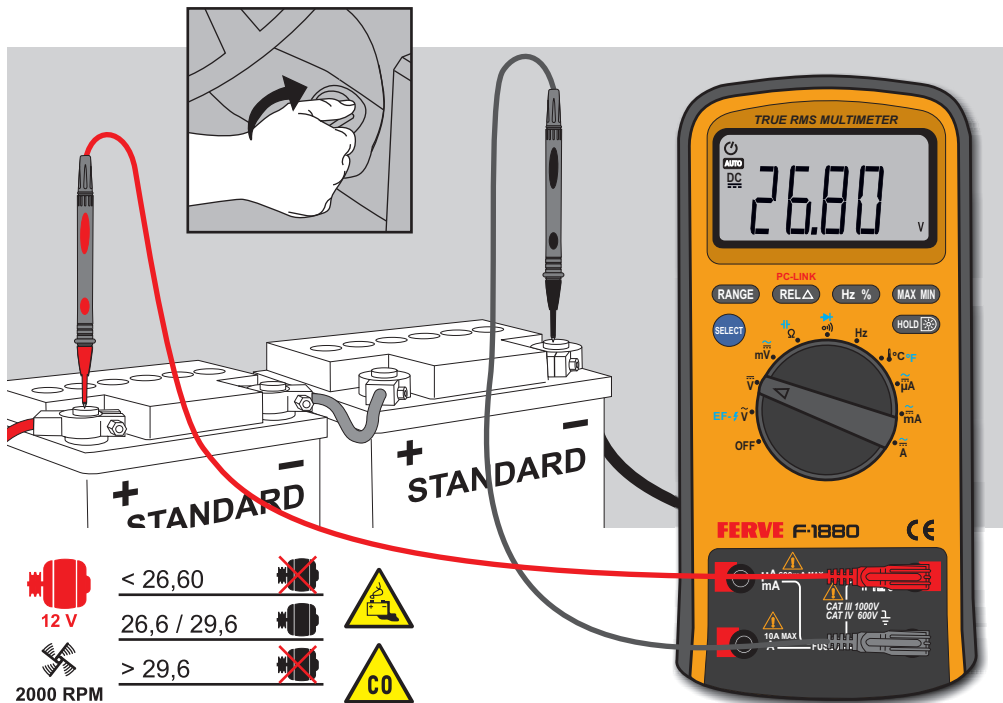








230 V~




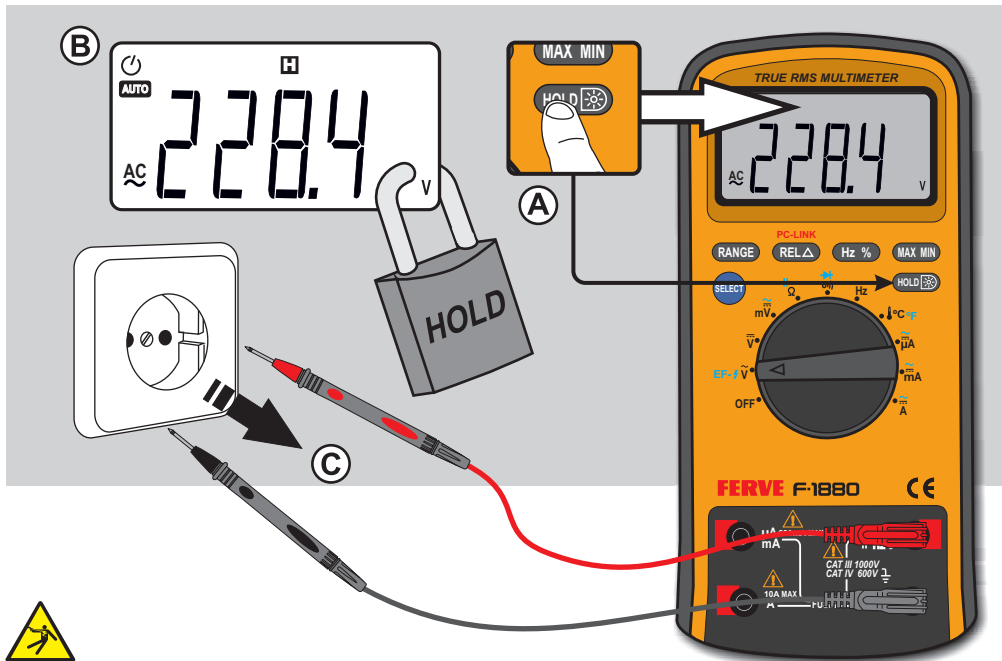


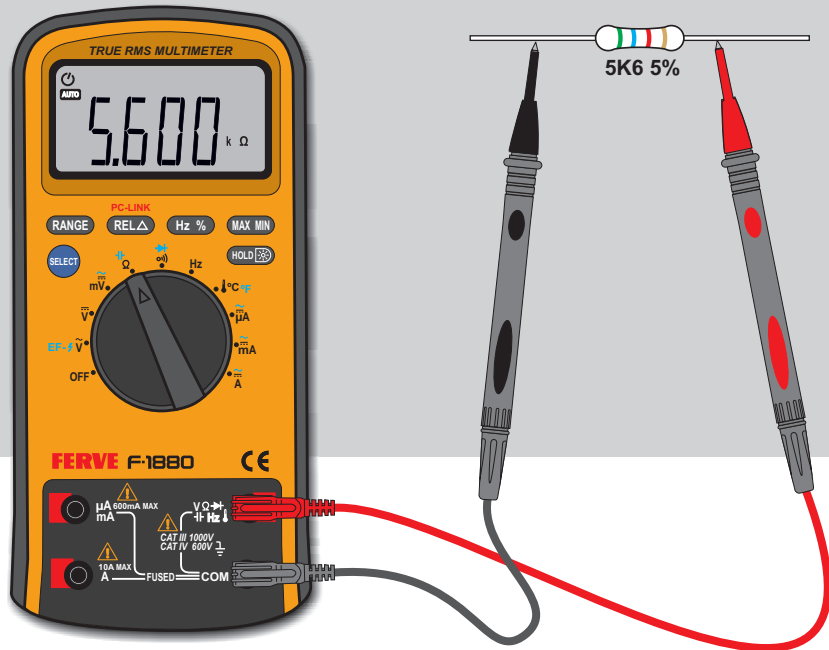


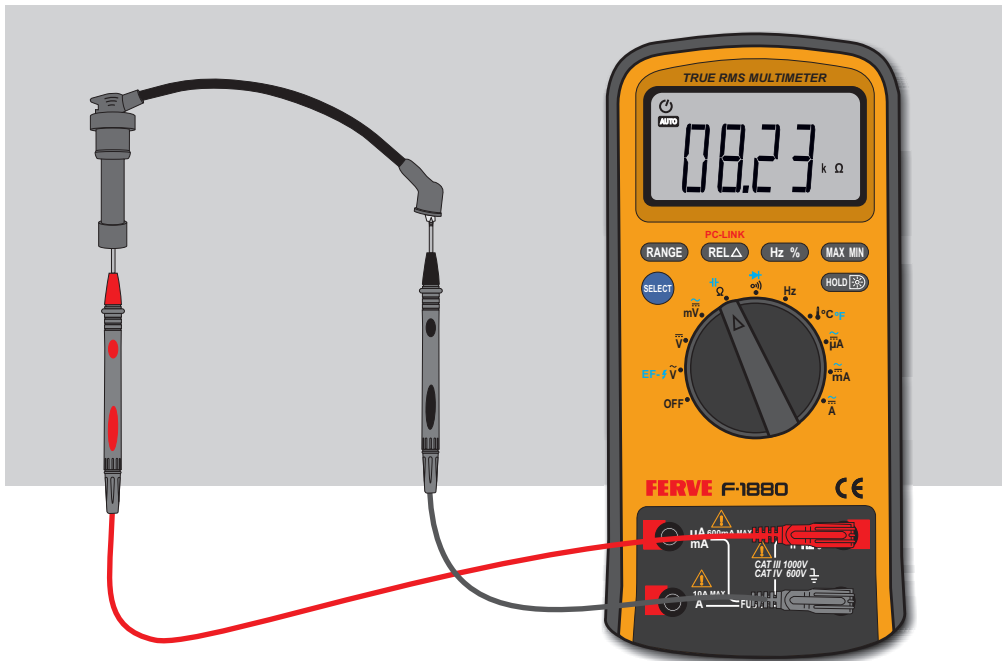




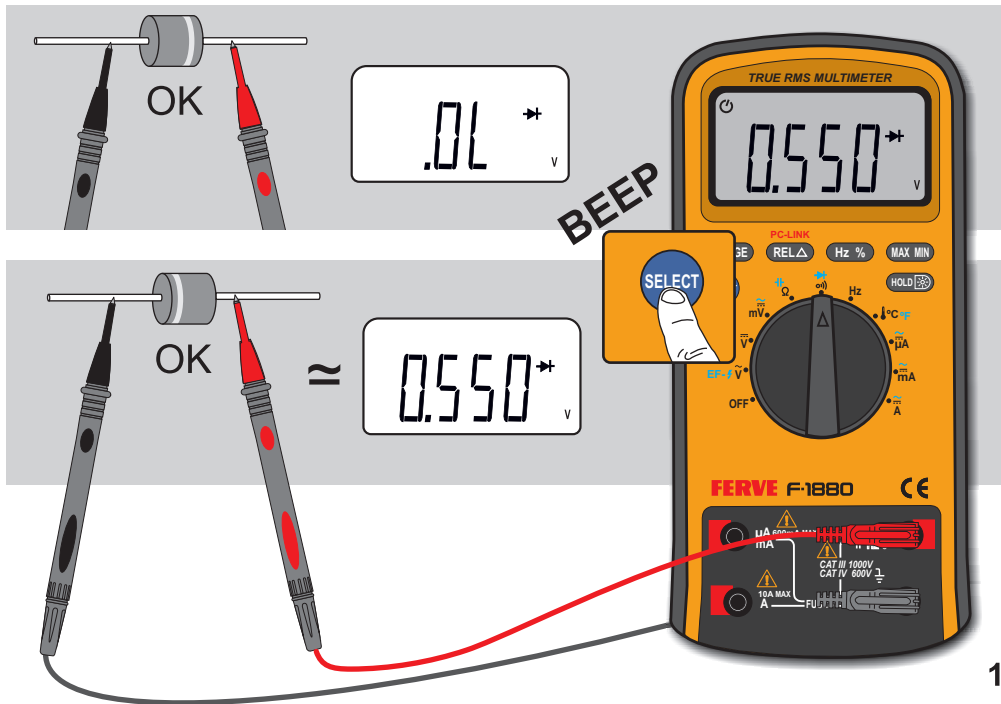


BEEP

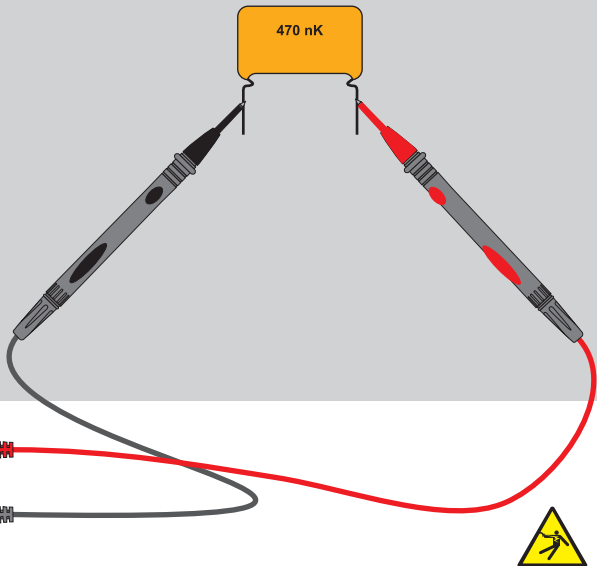






230 V~
50 Hz



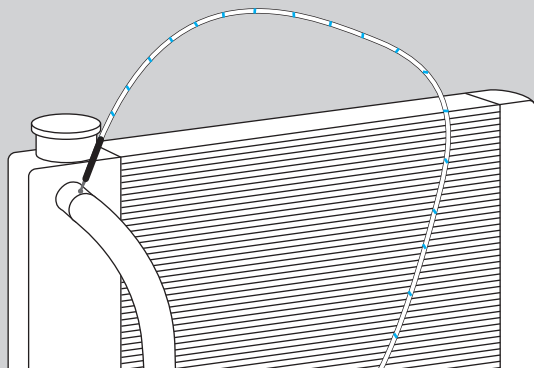

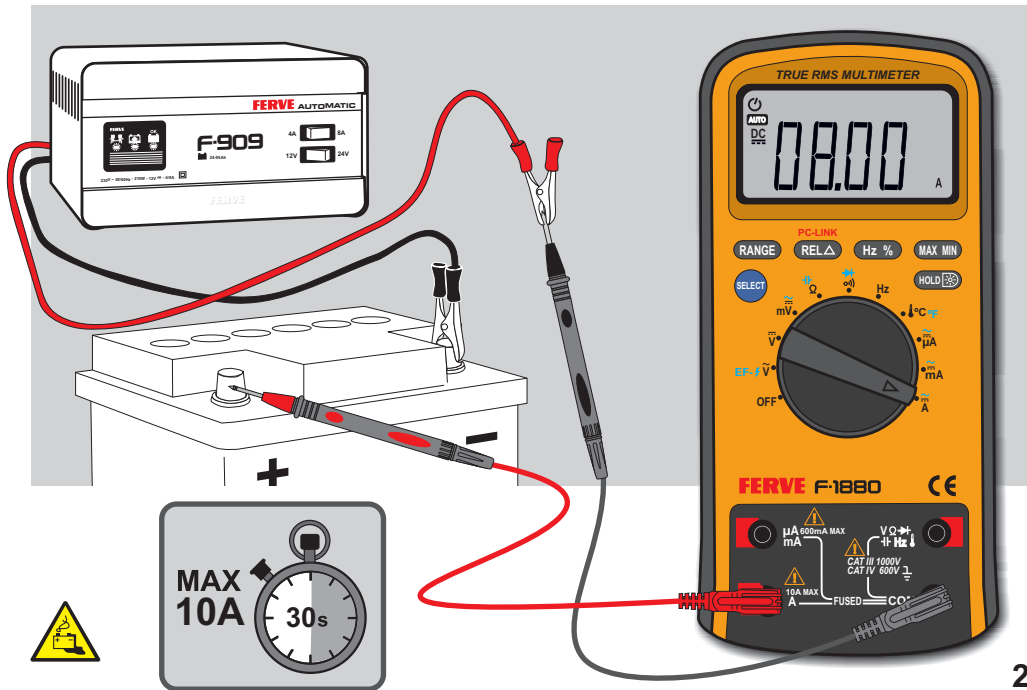

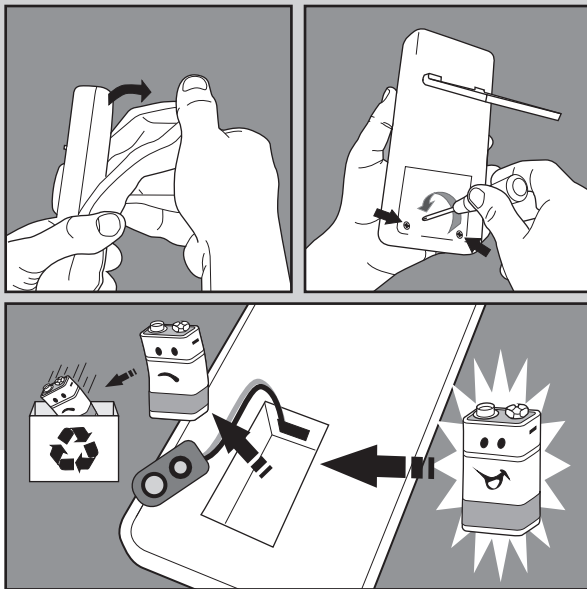

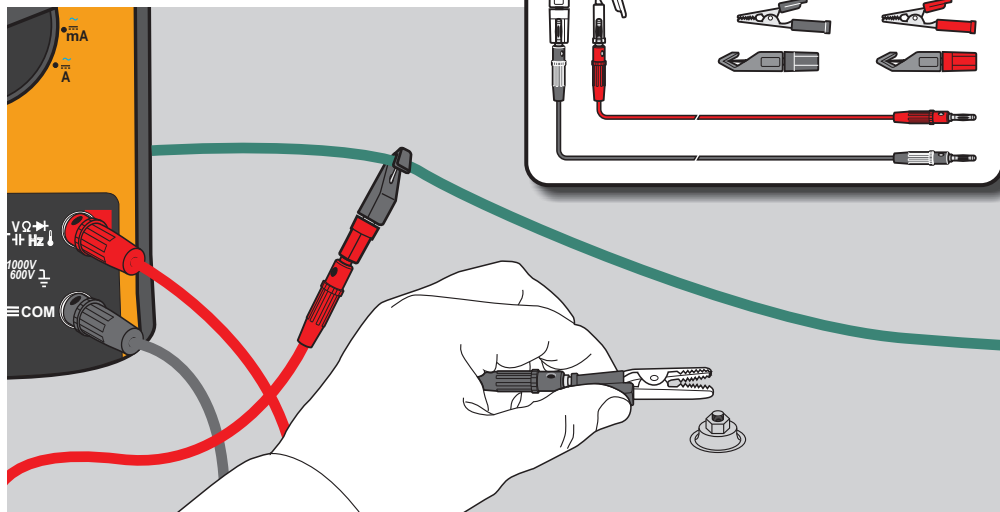

DC VOLTAGE / TENSIÓN DC (Autoranging/Autorrango)

Ranges/Rangos	Resolution/Resolución	Accuracy/Precisión
600mV	0.1mV	±(0.8% of rdg + 5 digits)
6V	1mV	
60V	10mV	
600V	100mV	
1000V	1V	±(1.0% of rdg + 2 digits)

AC VOLTAGE / TENSIÓN AC (Autoranging/Autorrango)

Ranges/Rangos	Resolution/Resolución	Accuracy/Precisión
600mV	0.1mV	±(1.0% of rdg + 5 digits)
6V	1mV	
60V	10mV	
600V	100mV	
1000V	1V	±(1.5% of rdg + 5 digits)

RESISTANCE / RESISTENCIA (Autoranging/Autorrango)

Ranges/Rangos	Resolution/Resolución	Accuracy/Precisión
600.0Ω	0.1Ω	±(0.5% of rdg + 3 digits)
6.000kΩ	1Ω	±(0.5% of rdg + 2 digits)
60.00kΩ	10Ω	
600.0kΩ	100Ω	
6.000MΩ	1kΩ	
60.00MΩ	10kΩ	±(1.5% of rdg + 5 digits)

DC CURRENT / INTENSIDAD DC

Ranges/Rangos	Resolution/Resolución	Accuracy/Precisión
600 μ A	0.1 μ A	$\pm(1.5\%$ of rdg + 3 digits)
6000 μ A	1 μ A	
60mA	0.01mA	$\pm(1.5\%$ of rdg + 3 digits)
600mA	0.1mA	
6A	1mA	$\pm(1.5\%$ of rdg + 5 digits)
10A	10mA	

AC CURRENT / INTENSIDAD AC

Ranges/Rangos	Resolution/Resolución	Accuracy/Precisión
600 μ A	0.1 μ A	$\pm(1.8\%$ of rdg + 5 digits)
6000 μ A	1 μ A	
60mA	0.01mA	$\pm(1.8\%$ of rdg + 5 digits)
600mA	0.1mA	
6A	1mA	$\pm(3\%$ of rdg + 8 digits)
10A	10mA	

CAPACITANCE / MEDIDAS DE CAPACIDAD (Autoranging/Autorrango)

Ranges/Rangos	Resolution / Resolución	Accuracy/Precisión
60nF	10pF	<10nF: $\pm[5.0\%$ of (rdg - 50 digits)+ 20 digits] $\pm(3\%$ of rdg + 10 digits)
600nF	100pF	$\pm(5.0\%$ of rdg + 10 digits)
6 μ F	1nF	
60 μ F	10nF	
300 μ F	100nF	

FREQUENCY / FRECUENCIA (1Hz~1MHz)

Ranges/Rangos	Resolution/Resolución	Accuracy/Precisión
99.99Hz	0.01Hz	±(0.1% of rdg + 3 digits)
999.9Hz	0.1Hz	
9.999kHz	0.001kHz	
99.99kHz	0.01kHz	
999.9kHz	0.1kHz	

FREQUENCY / FRECUENCIA (6Hz~10kHz)

Ranges/Rangos	Resolution/Resolución	Accuracy/Precisión
99.99Hz	0.01Hz	±(0.05% of rdg + 8 digits)
999.9Hz	0.1Hz	
9.999kHz	0.001kHz	
Above accuracies can be guaranteed within 10%~100% of the full range		

TEMPERATURE / TEMPERATURA

Ranges/Rangos	Resolution/Resolución	Accuracy/Precisión
-55°C~0°C	0.1°C	±(5.0% of rdg + 4°C)
1°C~400°C		±(2.0% of rdg + 3°C)
401°C~1000°C	1°C	±2.0% of rdg

CONTINUITY / CONTINUIDAD

Ranges/Rangos	Resolution/Resolución	Test Condition
600Ω	0.1Ω	Open circuit voltage: approx. 0.5V

DIODE TEST / PRUEBA DIODO

Test current / Intensidad test	Resolution / Resolución	Test Condition
1V	0.001V	Forward DC current approx. 1mA. Reversed DC voltage approx. 1.5V



**DECLARACIÓN DE CONFORMIDAD
DECLARATION OF CONFORMITY
DÉCLARATION DE CONFORMITÉ
KONFORMITÄTSERKLÄRUNG
CONFORMITEITSVERKLARING**

Nosotros, We, Nous, Wir, Wij,

FERVE, S.A.

declaramos, bajo nuestra única responsabilidad, que el producto
declare, under our sole responsibility, that the product
déclarons, sur notre seule responsabilité, que le produit
erklären, in alleiniger Verantwortung, daß das Produkt
verklaren, onder onze eigen verantwoordelijkheid, dat de producten

F-1880

al cual esta declaración se refiere, es conforme a la siguiente norma:
to which this declaration relates, is in conformity with the following standard:
auquel se réfère cette déclaration, est conforme à la norme :
auf das sich diese Erklärung bezieht, mit der folgenden Norm:
waar deze verklaring zich op richt, in overeenstemming is met de volgende standaard:

1000V CATIII / 600V CAT IV IEC 61010-1:2001

según las disposiciones de la Directiva:
following the provisions of Directive:
conformement aux dispositions de Directive :
Gemäß den Bestimmungen der Richtlinie:
volgens de richtlijn:

2006/95/CE

El Vendrell, 2022

FERVE

FERVE, S.A

Ctra. de Calafell, 15-25 - Apartado (P.O. Box) 7
43700 El Vendrell (España)

www.ferve.com

2018801 - 0122