EDC6-450 (6V 450Ah)

Deep Cycle Batteries

Specifications

Nominal Voltage	6V	
Nominal Capacity(20 Hr)	450Ah	
Dimension	Length	295±1mm(11.62 inches)
	Width	178±1mm(7.01 inches)
	Containeriner Height	404±1mm(15.91 inches)
	Total Height (With terminal)	424±1mm(16.69 inches)
Approx Weight	Approx57.0kgs(125.66 lbs)	
Design life	12 years	
Terminal	DT	
Container Material	ABS	
Rated Capacity	450.0Ah/22.5A	(20hr, 1.75V/Cell, 25 ℃/77℉)
	409.3Ah/40.93A	(10hr, 1.80V/Cell, 25 ℃/77℉)
	345.0Ah/69.00A	(5hr, 1.75V/Cell, 25 ℃/77℉)
	249.6Ah/249.6A	(1hr, 1.60V/Cell, 25 ℃/77℉)
Max. Discharge Current	2000A(5s)	
Internal Resistance	Appro≤1.9mΩ	
Operating Temp. Range	Discharge: -20 ℃~50 ℃	
	Charge: 0 ℃~40 ℃	
	Storage: -20 ℃~50 ℃	
Nominal Operating Temp. Range	25±3 ℃(77±5℉)	
Cycle Use	Initial Charging Current Less than 75.6 A. Voltage 14.4V-15.0V at 25 ℃(77℉) Temp. Coefficient-20mV/C	
Standby Use	No limit on Intital Charging Current Voltage 13.5V-13.8V at 25 ℃(77℉) Temp. Coefficient-20mV/C	
Capacity affected by Temperature	40 ℃(104℉)	103%
	25 ℃(77℉)	100%
	0 ℃(32℉)	86%
Self Discharge	EDC series batteries may be stored for up to 6 months at25 ℃(77℉) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

Application

- All purpose
- Uninterruptable Power Supply(UPS)
- Electric Power System(EPS)
- Emergency backup power supply
- Emergency light
- Railway signal
- Aircraft signal
- Alarm and security system
- Electronic apparatus & equipment
- Communication power supply
- DC power supply
- Auto controlsystem

Constant Current Discharge (Amperes) at 25 ℃ (77F)

F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
1.60V	540.5	345.2	253.7	233.5	148.3	104.2	70.6	46.6	41.58	22.26	5.04
1.67V	530.9	338.9	249.1	228.9	145.3	102.1	69.3	45.8	40.74	21.84	4.96
1.70V	520.8	332.6	244.4	224.7	142.8	100.4	68.0	44.9	39.90	21.42	4.83
1.75V	511.1	326.3	239.8	220.5	139.9	98.3	66.8	44.1	39.48	21.00	4.75
1.80V	491.4	313.7	230.6	212.1	134.4	94.5	64.3	42.4	38.22	20.79	4.66

Constant Power Discharge (Watts) at 25 ℃ (77F)

F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
1.60V	1040.3	664.4	488.5	448.1	284.8	199.9	136.1	89.5	80.2	43.4	9.70
1.67V	1021.4	652.3	479.2	440.2	279.7	196.6	133.6	88.2	78.5	42.5	9.49
1.70V	1002.5	640.1	470.4	431.8	274.7	192.8	131.0	86.5	77.3	42.2	9.32
1.75V	983.6	627.9	461.6	423.8	269.2	189.0	128.5	84.8	75.6	41.6	9.16
1.80V	945.8	604.0	443.9	407.4	259.1	181.9	123.9	81.5	72.7	40.3	8.99

EDC6-450 (6V 450Ah)

Deep Cycle Batteries

Dimensions









Discharge Characteristics

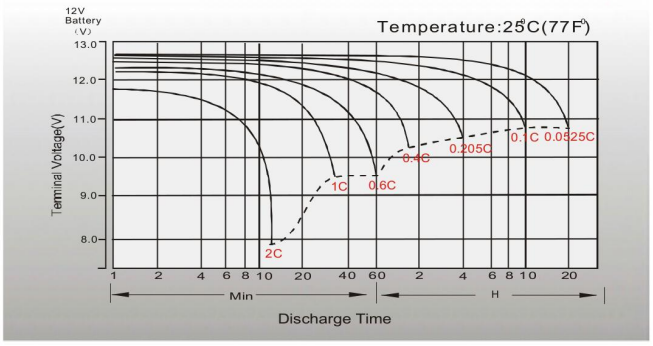

Float Charging Characteristics

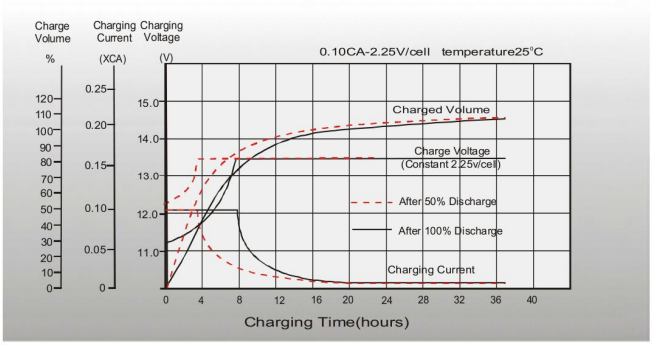

Temperature Effects in Relation to Battery Capacity

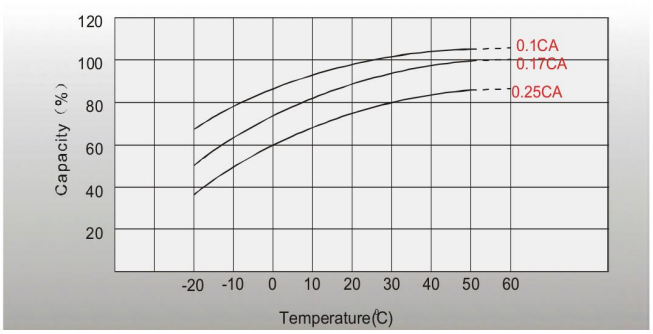

Effect of Temperature on Long Term Float Life

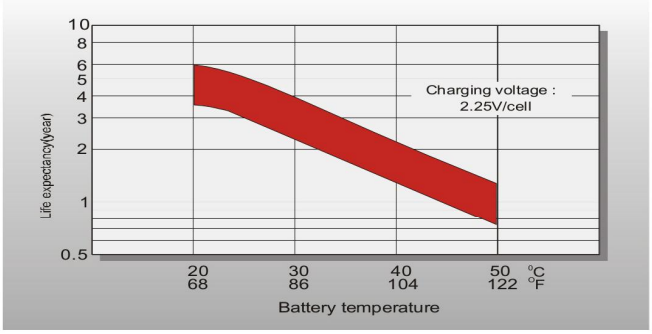

Cycle life in Relation to Depth of Discharge

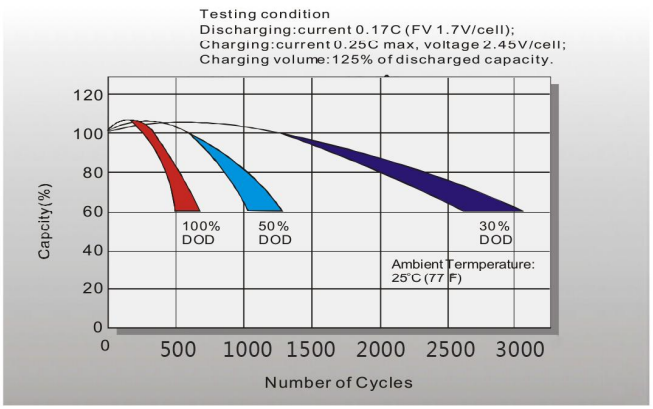

Self-discharge Characteristics

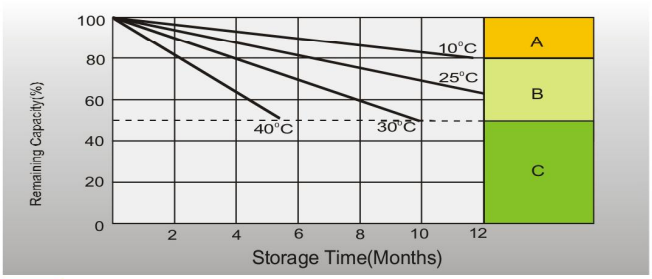

A No supplementary charge required.
(Carry out supplementary charge before use if 100% capacity is required.)

B Supplementary charge required before use.Optional charging way as below:
1.Charged for above 3 days at limted current 0.25CA and constant volatge 2.25V/cell.
2.Charged for above 20 hours at limted current 0.25CA and constant volatge 2.45V/cell.
3.Charged for 8~10 hours at limited current 0.05CA .

C Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.

Specifications subject to change without prior notice.